

CMOS PLL SYNTHESIZERS

Analysis and Design

Keliu Shu
Edgar Sánchez-Sinencio

 Springer

CMOS PLL Synthesizers: Analysis and Design

**THE KLUWER INTERNATIONAL SERIES IN ENGINEERING AND
COMPUTER SCIENCE**

ANALOG CIRCUITS AND SIGNAL PROCESSING
Consulting Editor: Mohammed Ismail, Ohio State University

Related Titles:

- OPERATIONAL AMPLIFIER SPEED AND ACCURACY IMPROVEMENT**
Ivanov and Filanovsky
ISBN: 1-4020-7772-6
- STATIC AND DYNAMIC PERFORMANCE LIMITATIONS FOR HIGH SPEED
D/A CONVERTERS**
van den Bosch, Steyaert and Sansen
ISBN: 1-4020-7761-0
- DESIGN AND ANALYSIS OF HIGH EFFICIENCY LINE DRIVERS FOR Xdsl**
Piessens and Steyaert
ISBN: 1-4020-7727-0
- LOW POWER ANALOG CMOS FOR CARDIAC PACEMAKERS**
Silveira and Flandre
ISBN: 1-4020-7719-X
- MIXED-SIGNAL LAYOUT GENERATION CONCEPTS**
Lin, van Roermund, Leenaerts
ISBN: 1-4020-7598-7
- HIGH-FREQUENCY OSCILLATOR DESIGN FOR INTEGRATED TRANSCEIVERS**
Van der Tang, Kasperkovitz and van Roermund
ISBN: 1-4020-7564-2
- CMOS INTEGRATION OF ANALOG CIRCUITS FOR HIGH DATA RATE TRANSMITTERS**
DeRanter and Steyaert
ISBN: 1-4020-7545-6
- SYSTEMATIC DESIGN OF ANALOG IP BLOCKS**
Vandenbussche and Gielen
ISBN: 1-4020-7471-9
- SYSTEMATIC DESIGN OF ANALOG IP BLOCKS**
Cheung & Luong
ISBN: 1-4020-7466-2
- LOW-VOLTAGE CMOS LOG COMPANDING ANALOG DESIGN**
Serra-Graells, Rueda & Huertas
ISBN: 1-4020-7445-X
- CIRCUIT DESIGN FOR WIRELESS COMMUNICATIONS**
Pun, Franca & Leme
ISBN: 1-4020-7415-8
- DESIGN OF LOW-PHASE CMOS FRACTIONAL-N SYNTHESIZERS**
DeMuer & Steyaert
ISBN: 1-4020-7387-9
- MODULAR LOW-POWER, HIGH SPEED CMOS ANALOG-TO-DIGITAL CONVERTER
FOR EMBEDDED SYSTEMS**
Lin, Kemna & Hosticka
ISBN: 1-4020-7380-1
- DESIGN CRITERIA FOR LOW DISTORTION IN FEEDBACK OPAMP CIRCUITE**
Hernes & Saether
ISBN: 1-4020-7356-9
- CIRCUIT TECHNIQUES FOR LOW-VOLTAGE AND HIGH-SPEED A/D CONVERTERS**
Walteri
ISBN: 1-4020-7244-9
- DESIGN OF HIGH-PERFORMANCE CMOS VOLTAGE CONTROLLED OSCILLATORS**
Dai and Harjani
ISBN: 1-4020-7238-4
- CMOS CIRCUIT DESIGN FOR RF SENSORS**
Gudnason and Bruun
ISBN: 1-4020-7127-2

Keliu Shu
Edgar Sánchez-Sinencio

CMOS PLL Synthesizers: Analysis and Design

Springer

eBook ISBN: 0-387-23669-4
Print ISBN: 0-387-23668-6

©2005 Springer Science + Business Media, Inc.

Print ©2005 Springer Science + Business Media, Inc.
Boston

All rights reserved

No part of this eBook may be reproduced or transmitted in any form or by any means, electronic, mechanical, recording, or otherwise, without written consent from the Publisher

Created in the United States of America

Visit Springer's eBookstore at: <http://ebooks.kluweronline.com>
and the Springer Global Website Online at: <http://www.springeronline.com>

Contents

List of Acronyms and Symbols	ix
Preface	xv
1 Introduction	1
1.1 MOTIVATION	1
1.2 SUMMARY OF BOOK	2
1.3 BOOK ORGANIZATION	4
REFERENCES	5
2 Frequency Synthesizer for Wireless Applications	7
2.1 DEFINITION AND CHARACTERISTICS	7
2.2 PHASE NOISE AND TIMING JITTER	8
2.2.1 Phase noise and spurious tone	8
2.2.2 Timing jitter	11
2.3 IMPLEMENTATION OF FREQUENCY SYNTHESIZER	14
2.3.1 Direct analog frequency synthesizer.....	14
2.3.2 Direct digital frequency synthesizer	15
2.3.3 PLL-based frequency synthesizer.....	16
2.3.4 DLL-based frequency synthesizer	20
2.3.5 Hybrid frequency synthesizer	21
2.3.6 Summary and comparison of synthesizers.....	21
2.4 FREQUENCY SYNTHESIZER FOR WIRELESS TRANSCEIVERS	22
2.5 OTHER APPLICATIONS OF PLL AND FREQUENCY SYNTHESIZER	24
REFERENCES	26

3 PLL Frequency Synthesizer	31
3.1 PLL FREQUENCY SYNTHESIZER BASICS	31
3.1.1 Basic building blocks of charge-pump PLL	31
3.1.2 Continuous-time linear phase analysis	34
3.1.3 Locking time	44
3.1.4 Tracking and acquisition	56
3.2 FAST-LOCKING TECHNIQUES	58
3.2.1 Bandwidth gear-shifting	58
3.2.2 VCO pre-tuning	60
3.3 DISCRETE-TIME ANALYSIS AND NONLINEAR MODELING	60
3.3.1 z-domain transfer function and stability analysis	60
3.3.2 Nonlinear dynamic behavior modeling	62
3.4 DESIGN EXAMPLE: 2.4GHZ INTEGER-N PLL FOR BLUETOOTH	62
REFERENCES	65
4 $\Sigma\Delta$ Fractional-N PLL Synthesizer	69
4.1 $\Sigma\Delta$ FRACTIONAL-N FREQUENCY SYNTHESIZER	69
4.1.1 $\Sigma\Delta$ quantization noise to phase noise mapping	70
4.1.2 $\Sigma\Delta$ quantization noise to timing jitter mapping	73
4.2 A COMPARATIVE STUDY OF DIGITAL $\Sigma\Delta$ MODULATORS	73
4.2.1 Design considerations	73
4.2.2 Four types of digital $\Sigma\Delta$ modulators	74
4.2.3 Summary of comparative study	87
4.3 OTHER APPLICATIONS OF $\Sigma\Delta$ -PLL	90
4.3.1 Direct digital modulation	90
4.3.2 Frequency-to-digital conversion	91
4.4 MODELING AND SIMULATION OF $\Sigma\Delta$ -PLL	92
4.5 DESIGN EXAMPLE: 900MHZ $\Sigma\Delta$ -PLL FOR GSM	95
REFERENCES	98
5 Enhanced Phase Switching Prescaler	103
5.1 PRESCALER ARCHITECTURE	103
5.1.1 Conventional prescaler	103
5.1.2 Phase switching prescaler	105
5.1.3 Injection-locked prescaler	107
5.1.4 Summary and comparison of prescalers	107
5.2 ENHANCED PHASE-SWITCHING PRESCALER	108
5.3 CIRCUIT DESIGN AND SIMULATION RESULTS	110
5.3.1 Eight 45°-spaced phases generation	110
5.3.2 8-to-1 multiplexer	111
5.3.3 Switching control circuit	112
5.3.4 Asynchronous frequency divider	113
5.4 DELAY BUDGET IN THE SWITCHING CONTROL LOOP	115

5.5 SPURS DUE TO NONIDEAL 45° PHASE SPACING	117
REFERENCES	123
6 Loop Filter With Capacitance Multiplier	127
6.1 LOOP FILTER ARCHITECTURE	127
6.1.1 Passive loop filter	127
6.1.2 Dual-path loop filter.....	128
6.1.3 Sample-reset loop filter.....	131
6.1.4 Other loop filter architectures.....	133
6.1.5 Summary and comparison of loop filters.....	137
6.2 LOOP FILTER AND CHARGE-PUMP NOISE MAPPING	138
6.3 LOOP FILTER WITH CAPACITANCE MULTIPLIER	141
6.3.1 Third-order passive loop filter	141
6.3.2 Capacitance multiplier.....	142
6.3.3 Simulation of loop filter with capacitance multiplier	145
6.3.4 Noise consideration	148
REFERENCES	149
7 Other Building Blocks of PLL	151
7.1 VCO	151
7.1.1 LC-VCO	151
7.1.2 Varactor	152
7.1.3 Inductor.....	155
7.1.4 VCO phase noise	156
7.1.5 Layout.....	161
7.2 PHASE-FREQUENCY DETECTOR	162
7.3 CHARGE-PUMP	164
7.3.1 Reference spur	164
7.3.2 Charge pump architectures	171
7.4 PROGRAMMABLE DIVIDER	173
7.5 DIGITAL $\Sigma\Delta$ MODULATOR	176
7.6 CHIP LAYOUT	176
REFERENCES	178
8 Prototype Measurement Results	183
8.1 PRESCALER MEASUREMENT	183
8.2 LOOP FILTER MEASUREMENT	186
8.3 PLL MEASUREMENT	188
REFERENCES	194
9 Conclusions	195
Appendix	199

List of Acronyms and Symbols

AAC	Automatic Amplitude Control
BPF	Band-Pass Filter
CCO	Current-Controlled Oscillator
CDR	Clock and Data Recovery
CMOS	Complementary Metal Oxide Semiconductor
CP	Charge-Pump
DAC	Digital-to-Analog Converter
DAS	Direct Analog Synthesizer
DDS	Direct Digital Synthesizer
DFDD	Digital Frequency Difference Detector
DLL	Delay-Locked Loop
DPA	Digital Phase Accumulator
DUT	Device Under Test
FDC	Frequency-to-Digital Converter
FF	Flip-Flop
FHSS	Frequency-Hopping Spread Spectrum
FM	Frequency Modulation
FN	Fractional-N
FS	Frequency Synthesizer
GSM	Global System for Mobile communications
IC	Integrated Circuit
ILFD	Injection-Locked Frequency Divider
ISF	Impulse Sensitivity Factor
ISM	Industrial Scientific Medicine
LF	Loop Filter
LO	Local Oscillator
LTI	Linear Time-Invariant
LSB	Least-Significant-Bit

MASH	Multi-stage noise Shaping
NAND	Negative AND logic
NCO	Numerically Controlled Oscillator
NMOS	N-channel Metal Oxide Semiconductor
NOR	Negative OR logic
OPA	Operational Amplifier
OSR	Over Sampling Ratio
OTA	Operational Transconductance Amplifier
PD	Phase Detector
PFD	Phase-Frequency Detector
PGS	Patterned Ground Shield
PLL	Phase-Locked Loop
PMOS	P-channel Metal Oxide Semiconductor
PSD	Power Spectral Density
RF	Radio Frequency
<i>rms</i>	Root-Mean-Square
SC	Switched Capacitor
SCL	Source-Coupled Logic
SDM	Sigma-Delta Modulator
SNR	Signal-to-Noise Ratio
SSB	Single-Sideband
TSPC	True-Single-Phase-Clock
VCO	Voltage-Controlled Oscillator
XOR	Exclusive OR logic
ω	angular frequency in <i>rad/s</i>
ω_{-3dB}	PLL $-3dB$ loop bandwidth
ω_c	PLL loop (unity-gain / crossover) bandwidth
ω_{c1}	1 st corner frequency of capacitance multiplier impedance
ω_{c2}	2 nd corner frequency of capacitance multiplier impedance
ω_{c3}	3 rd corner frequency of capacitance multiplier impedance
ω_n	natural frequency
ω_{p1}	1 st pole-frequency of loop filter transimpedance
ω_{p2}	2 nd pole-frequency of loop filter transimpedance
ω_{p3}	3 rd pole-frequency of loop filter transimpedance
ω_{ref}	PLL reference angular frequency (at PFD)
ω_z	zero-frequency of loop filter
$\omega_{1/f}$	corner angular frequency of $1/f$ noise
$\Delta\omega_{1/f^3}$	corner angular frequency of oscillator $1/f^3$ phase noise

$\Delta\omega$	angular frequency offset from carrier
$\Delta\omega_H$	PLL hold range
$\Delta\omega_L$	PLL lock range
$\Delta\omega_P$	PLL pull-in range
$\Delta\omega_{PO}$	PLL pull-out range
ϕ	phase
ϕ_m	phase margin
$\Delta\phi$	amplitude of phase modulation
$\Delta\phi_{rms}$	PLL output <i>rms</i> phase noise
θ	phase
θ_e	phase error at PFD inputs
θ_{in}	input phase (noise)
θ_{out}	output phase (noise)
θ_{vco}	VCO phase noise
φ	random phase variation
ζ	damping factor
ε	normalized settling frequency error of PLL
\mathcal{L}	phase noise in <i>dBc/Hz</i>
σ_c	<i>rms</i> of cycle jitter
σ_{cc}	<i>rms</i> of cycle-to-cycle jitter
τ	time
δ	impulse function (Dirac delta function)
δ_T	periodic impulse function with period <i>T</i>
Γ	ISF function
B	current ratio
C_1	1 st capacitance of passive loop filter
C_2	2 nd capacitance of passive loop filter
C_3	3 rd capacitance of passive loop filter
C_{p1}	1 st parasitic capacitance of capacitance multiplier
C_{p2}	2 nd parasitic capacitance of capacitance multiplier
f	frequency in <i>Hz</i>
f_0	carrier frequency
f_c	PLL loop (unity-gain / crossover) bandwidth
f_{div}	loop divider output frequency
f_m	modulation frequency

f_{ref}	PLL reference frequency (at PFD)
f_{vco}	VCO frequency
f_{RF}	RF frequency (of mixer)
f_{LO}	local oscillator frequency
Δf	offset frequency from the carrier
$\Delta f_{1/f^3}$	corner frequency of oscillator $1/f^3$ phase noise
F	active device noise factor
g	conductance, transconductance
G	conductance, transconductance
h	transfer function
H	transfer function
H_{cl}	PLL closed-loop input-to-output phase (noise) transfer function
H_e	PLL input phase (noise) to PFD phase error transfer function
H_{ol}	PLL open-loop input-to-output phase (noise) transfer function
H_{Vc}	PLL input phase to LF output voltage transfer function
i	current
i_{cp}	charge-pump current noise
I	current
	in-phase signal
I_c	control current of CCO
I_{cp}	charge-pump current
I_{cpi}	charge-pump current of integration path
I_{cpp}	charge-pump current of proportional path
I_{dn}	charge-pump current for discharging the load capacitor
I_p	output current of LF's proportional path
I_{up}	charge-pump current for charging the load capacitor
I_z	output current of LF's integration path
j	integer number
k	binary integer input of DPA or digital SDM Boltzmann constant
K	PLL loop gain
K_{pd}	PFD and charge-pump gain in A/rad
K_{vco}	VCO conversion gain in $rad/s/V$
K_{cco}	CCO conversion gain in $rad/s/A$

L	integer number (order of SDM) inductance
m	integer number
M	modulus of DPA or digital SDM
n	integer number
n_Q	output integer of digital SDM
N	number (nominal) frequency divide ratio of loop divider
N_B	integer part of fractional-N divide ratio
P	prescaler divide ratio power
P_r	PLL reference spur level in dBc
q	charge
Q	quadrature signal quality factor quantization noise
Q_L	loaded quality factor
R	resistance auto-correlation function
R_1	1 st resistance of passive loop filter
R_2	2 nd resistance of passive loop filter
R_φ	auto-correlation function of random phase φ
S	power spectrum
S_φ	power spectral density of random phase variation
S_V	power spectral density of signal $V(t)$
t	time
t_{on}	charge-pump turn-on time in locked state
T	time temperature
T_L	PLL lock-in time (rough estimation)
T_P	PLL pull-in time
T_{ref}	period of PLL reference signal
ΔT_{abs}	absolute jitter
ΔT_{cn}	cycle-to-average jitter
ΔT_{ccn}	cycle-to-cycle jitter
u	unit step function
v	voltage
V	voltage

V_c	VCO control voltage, LF output voltage
V_p	output voltage of LF's proportional path
V_z	output voltage of LF's integration path
v_{lf}	loop filter output voltage noise
y	admittance
z	impedance
Z	impedance, transimpedance
Z_{lf}	loop filter transimpedance

Preface

Thanks to the advance of semiconductor and communication technology, the wireless communication market has been booming in the last two decades. It evolved from simple pagers to emerging third-generation (3G) cellular phones. In the meanwhile, broadband communication market has also gained a rapid growth. As the market always demands high-performance and low-cost products, circuit designers are seeking high-integration communication devices in cheap CMOS technology.

The phase-locked loop frequency synthesizer is a critical component in communication devices. It works as a local oscillator for frequency translation and channel selection in wireless transceivers and broadband cable tuners. It also plays an important role as the clock synthesizer for data converters in the analog-and-digital signal interface.

This book covers the design and analysis of PLL synthesizers. It includes both fundamentals and a review of the state-of-the-art techniques. The transient analysis of the third-order charge-pump PLL reveals its locking behavior accurately. The behavioral-level simulation of PLL further clarifies its stability limit. Design examples are given to clearly illustrate the design procedure of PLL synthesizers. A complete derivation of reference spurs in the charge-pump PLL is also presented in this book.

The in-depth investigation of the digital $\Sigma\Delta$ modulator for fractional-N synthesizers provides insightful design guidelines for this important block. As the prescaler is often the speed bottleneck of high-frequency PLL synthesizers, it is covered in a single chapter in this book. An inherently glitch-free low-power phase-switching prescaler was developed. The timing analysis of the switching control loop gives good understanding for a sound design. As spurs generated from the delay mismatch in the phase-switching

prescaler might be a concern, it is mathematically examined. Another single chapter in this book is devoted to the loop filter, which is an integration bottleneck in narrow-band PLL because its big capacitor takes a large chip area. A simple area-efficient on-chip loop filter solution was proposed. It is based on a capacitance multiplier, which is of very low complexity and power consumption. Detailed analysis and design of this novel loop filter was addressed.

As this book features a complete coverage of PLL synthesizer design and analysis techniques, the authors hope it will be a good manual for both academia researchers and industry designers in the PLL area.

Chapter 1

INTRODUCTION

1.1 Motivation

In the last decade, the rapid growth of wireless applications has led to an increasing demand of fully integrated, low-cost, low-power, and high-performance transceivers. The applications of wireless communication devices include pagers, cordless phones, cellular phones, global positioning systems (GPS), and wireless local area networks (WLAN), transmitting either voice or data. A standard specifies how devices talk to each other. Numerous standards emerged and are optimized for certain applications. For voice, examples include AMPS, NMT, TACS, D-AMPS, DECT, GSM, DCS, PCS, PDC, TDMA, CDMA, etc. It has evolved from analog to digital, from the 1G (first generation) to the current existing 2.5G, such as GPRS and EDGE. Devices in the 3G wireless standards, which include UMTS (WCDMA), CDMA2000 and TD-SCDMA, are also emerging in some areas of the world. For data, there are 802.11a/b/g WLAN, HiperLAN, Bluetooth, HomeRF, and so on. More recently, a significant interest has grown in the ultra wideband communications [1], [2]. Figure 1-1 briefly illustrates the frequency band of some wireless communication standards.

The recent boom of the mobile telecommunication market has driven worldwide electronic and communication companies to produce small-size, low-power, high-performance and certainly low-cost mobile terminals. The current wireless transceivers involve SiGe bipolar, GaAs and CMOS integrated RF front end and some discrete high-performance components. From a cost of technology point of view, the standard CMOS process is the cheapest one. With a constantly decreasing feature size, it is possible to

design the radio frequency integrated circuits (RFIC) in CMOS technology. A single-chip transceiver with a minimum number of off-chip components is preferred to reduce the cost and size of wireless devices, like cellular phones [3]-[7].

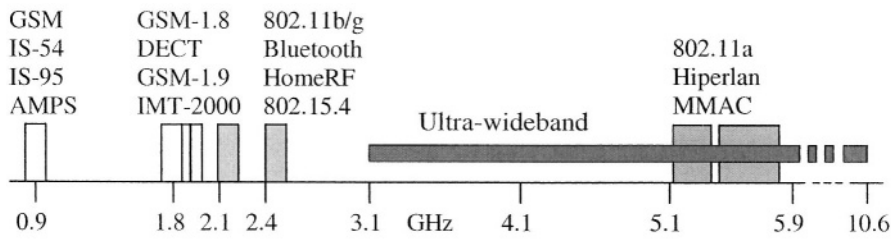


Figure 1-1. Frequency band of wireless communication standards

There are still many difficulties, however, in the process of integration of RF front-end due to the lack of high-quality components on chip. This book focuses on the design of the frequency synthesizer, one of the key building blocks of the RF front-end in CMOS technology. The frequency synthesizer is used as a local oscillator for frequency translation and channel selection in the RF front-end of wireless transceivers. It is a critical component in terms of the performance and cost of a wireless transceiver [8].

1.2 Summary of book

This book focuses on both fundamentals and advanced design techniques of PLL-based frequency synthesizers. A 2.4GHz fully integrated $\Sigma\Delta$ fractional-N frequency synthesizer prototype is implemented in 0.35 μm CMOS technology. Efforts have been put on the prescaler and loop filter, which are the speed and integration bottlenecks, respectively.

A low-power and robust prescaler using an enhanced phase-switching architecture was proposed [9]-[12]. The new architecture is based on generating eight 45°-spaced phases and judiciously arranging the phase-switching sequence to yield an inherently glitch-free phase-switching operation.

In the existing phase-switching architecture [13], the switching is made between four 90°-spaced phases generated by cascading two stages of $\div 2$ dividers. The prescaler's input frequency is divided by a factor of 4 before switching occurs. Since the frequency of the four signals to be switched by the multiplexer (MUX) is still high, the MUX is usually implemented with current-steering logic and voltage-level amplification is needed. In the proposed enhanced phase-switching architecture, one additional $\div 2$ divider is used to generate eight 45°-spaced signals. Since the input-signal frequency is

reduced by half, from $1/4$ to $1/8$ of the prescaler's input frequency, the MUX can be implemented with standard digital cells to save power consumption and the robustness of phase-switching operation is improved.

Furthermore, the main problem associated with the existing phase-switching architecture is the potential glitches if the switching occurs in the incorrect timing window. Thus, various significant efforts have been made in the literature to yield a glitch-free phase-switching prescaler [13]-[16]. However, all these glitch-removing schemes are not robust and often cost considerable power and area, or even sacrifice the prescaler's maximum operating speed. But in the proposed enhanced phase-switching architecture, an inherently glitch-free phase-switching operation is obtained by means of reversing the switching sequence. Thus, no retiming or synchronization circuit is needed for the switching control and the robustness of the switching operation is guaranteed.

To provide a further insight into the switching operation in the proposed phase-switching architecture, a detailed delay timing analysis of the switching control loop is given. By calculating the delay budget in the loop, we conclude that usually the first $\div 2$ divider is the only speed constraint of this enhanced phase-switching architecture.

The loop filter is a barrier in fully integrating a narrow-band PLL because of its large integrating capacitor. To make the loop capacitance of a narrow-band PLL as small as possible while keeping the same loop bandwidth, designers increase the loop resistance and reduce the charge-pump current. However, there are practical limitations for both the loop resistance and the charge-pump current. Thermal noise in the large resistor modulates the control voltage and generates phase noise in the VCO, and the charge-pump noise increases while the current decreases.

The dual-path topology has been a popular solution to this problem [17]-[22]. It equivalently scales down the largest integrating and zero-generating capacitance by the scaling factor of the dual charge-pump currents. Besides the increased noise and power due to active devices, the charge-pump of the integration path is still working with a very small current and contributes significant noise. Also, the delay mismatch of the dual charge-pumps may change the loop parameters. Furthermore, at least for the implementations in [18]-[20] and [22], the voltage decay of the low-pass path causes undesirable ripples on the VCO control voltage.

To overcome the constraints of the dual-path topology, a novel loop filter solution is proposed [10]-[12]. A capacitance multiplier [23] is used to reduce the capacitance by a large factor and make it easily integratable within a small chip area.

Besides contributions on the prescaler and loop filter, a comparative study of digital $\Sigma\Delta$ modulator for fractional-N PLL synthesizers is made [24] to investigate the optimal design of the digital $\Sigma\Delta$ modulator. A third-order

three-level digital $\Sigma\Delta$ modulator is employed to reduce the instantaneous phase error at the PFD. The folding of the $\Sigma\Delta$ -shaped phase noise is minimized by reducing nonlinearities of the PFD and charge pump [10]-[12], [24].

Furthermore, the derivation of the settling time of the third-order PLL, the derivation of spurs due to delay/phase mismatches in the phase-switching prescaler, a complete analysis of the reference spur in the charge-pump PLL, and the behavioral-level verification of the PLL stability limit are all presented in this book.

A prototype chip of the $\Sigma\Delta$ PLL synthesizer was fabricated in TSMC $0.35\mu\text{m}$, 4-metal 2-poly (4M2P) CMOS process through MOSIS. The die size is $2\text{mm}\times 2\text{mm}$. It includes a fully integrated $\Sigma\Delta$ fractional-N frequency synthesizer and some standalone building blocks for testing. The PLL takes an active area of 0.85mm^2 , of which the digital $\Sigma\Delta$ modulator occupies 0.5mm^2 . With a power supply of 1.5-V for VCO and prescaler, and 2.0-V for other blocks, the whole PLL system consumes 16mW , of which the VCO consumes 9mW . With the reference frequency of 50MHz , the measured phase noise is -128dBc/Hz at 10MHz offset and the reference spur is -57dBc .

The proposed prescaler only takes an area of 0.04mm^2 . With a 1.5-V power supply, it works well within the PLL's tuning range of $2.23\sim 2.45\text{GHz}$ and consumes 3mW . The proposed loop filter occupies 0.05mm^2 and its power consumption (0.2mW) and noise are negligible compared with the whole PLL.

1.3 Book organization

In Chapter 2, the fundamentals of the frequency synthesizer including its features, applications, implementations, and key parameters (jitter and phase noise) are reviewed. Various synthesizer architectures and their pros and cons are discussed.

In Chapter 3, the analysis of the PLL-based frequency synthesizer is covered. It includes the continuous-time linear analysis, discrete-time analysis, stability concerns, operation modes, and fast-locking techniques, etc. An integer-N PLL frequency synthesizer design example is given to illustrate the design procedure.

Chapter 4 concentrates on analysis and design of the $\Sigma\Delta$ fractional-N PLL frequency synthesizer. $\Sigma\Delta$ noise mapping methods are reviewed. A comparative study of digital $\Sigma\Delta$ modulators for fractional-N synthesis is conducted to provide detailed design considerations and guidelines for this block. Other applications of $\Sigma\Delta$ -PLL are surveyed and a design example of the $\Sigma\Delta$ -PLL is also included.

Chapter 5 is devoted to the design of the prescaler. The existing design techniques are overviewed. An enhanced, inherently glitch-free phase-switching prescaler is presented. Its architecture and circuit implementation are addressed in great detail. The delay budget of the switching control loop is analyzed to demonstrate its robustness. Furthermore, spurs generated from delay/phase mismatches are derived.

Chapter 6 covers the design of the on-chip loop filter. Current design approaches are addressed. An area- and power-efficient implementation of the on-chip loop filter based on a simple capacitance multiplier is proposed. The detailed design, analysis, and simulation results are provided.

In Chapter 7, the implementation of other building blocks of a $\Sigma\Delta$ PLL prototype is elaborated. It includes the phase-frequency detector (PFD), the charge-pump (CP), the LC-tuned voltage-controlled oscillator (VCO), the digital $\Sigma\Delta$ modulator (SDM), and the programmable pulse-swallowing frequency divider. A complete reference spur analysis is also made.

Chapter 8 gives the experimental results of the prototype frequency synthesizer and some standalone building blocks, such as the novel prescaler and loop filter. Measurement results verified the feasibility and robustness of the phase-switching prescaler and the practicality of the loop capacitance multiplier.

Conclusions of this book are drawn in Chapter 9.

Finally, the Matlab simulation of the charge-pump PLL is given in the Appendix. The PLL stability limit is verified through behavioral-level simulations.

REFERENCES

- [1] R. Fontana, A. Ameti, E. Richley, L. Beard, and D. Guy, "Recent advances in ultra wideband communications systems," *IEEE Conference on UWB Systems and Technologies*, 2002
- [2] G. Aiello, "Challenges for ultra-wideband (UWB) CMOS integration," *IEEE MTT-S Int. Microwave Symp. Dig.*, vol. 1, pp. 361-364, June 2003
- [3] J. Rudell, J. Ou, R. Narayanaswami, G. Chien, J. Weldon, L. Lin, K. Tsai, L. Lee, K. Khoo, D. Au, T. Robinson, D. Gerna, M. Otsuka, and P. Gray, "Recent developments in high integration multi-standard CMOS transceivers for personal communication systems," in *Proc. Int. Symp. Low Power Electronics and Design*, Monterey, CA, Aug. 1998, pp. 149-154
- [4] A. Rofougaran, G. Chang, J. Rael, J. Chang, M. Rofougaran, P. Chang, and A. Abidi, "The future of CMOS wireless transceivers," in *IEEE Int. Solid-State Circuits Conf. (ISSCC) Dig. Tech. Papers*, San Francisco, CA, Feb. 1997, pp. 118-119, 440
- [5] B. Razavi, "Challenges and trends in RF design," in *Proc. IEEE ASIC Conf.*, Rochester, NY, Sept. 1996, pp. 81-86
- [6] L. Larson, "Integrated circuit technology options for RFIC's – present status and future directions," *IEEE J. Solid-State Circuits*, vol. 33, pp. 387-399, Mar. 1998

- [7] Q. Huang, F. Piazza, P. Orsatti, and T. Ohguro, "The impact of scaling down to deep submicron on CMOS RF circuits," *IEEE J. Solid-State Circuits*, vol. 33, pp. 1023-1036, July 1998
- [8] B. Razavi, "Challenges in the design of frequency synthesizers for wireless applications," in *Proc. IEEE Custom Integrated Circuits Conf. (CICC)*, May 1997, pp. 395-402,
- [9] K. Shu and E. Sánchez-Sinencio, "A 5-GHz prescaler using improved phase switching," in *Proc. IEEE Int. Symp. Circuits and Systems (ISCAS)*, vol. 3, Phoenix, AZ, May 2002, pp. 85-88
- [10] K. Shu, E. Sánchez-Sinencio, and J. Silva-Martínez, "A 2.1-GHz monolithic frequency synthesizer with robust phase switching prescaler and loop capacitance scaling," in *Proc. IEEE Int. Symp. Circuits and Systems (ISCAS)*, vol. 4, Phoenix, AZ, May 2002, pp. 791-794
- [11] K. Shu, E. Sánchez-Sinencio, J. Silva-Martínez, and S. Embabi, "A 16mW, 2.23-2.45GHz fully integrated $\Sigma\Delta$ PLL with novel prescaler and loop filter in 0.35 μ m CMOS," in *Proc. IEEE Radio Frequency Integrated Circuits Symp.*, Philadelphia, PA, June 2003, pp. 181-184
- [12] K. Shu, E. Sánchez-Sinencio, J. Silva-Martínez, and S. Embabi, "A 2.4-GHz monolithic fractional-N frequency synthesizer with robust phase switching prescaler and loop capacitance multiplier," *IEEE J. Solid-State Circuits*, vol. 38, pp. 866-874, June 2003
- [13] J. Craninckx and M. Steyaert, "A 1.75-GHz/3-V dual-modulus divide-by-128/129 prescaler in 0.7- μ m CMOS," *IEEE J. Solid-State Circuits*, vol. 31, pp. 890-897, July 1996
- [14] M. Perrott, "Techniques for high data rate modulation and low power operation of fractional-N frequency synthesizers," Ph.D. dissertation, Mass. Inst. Technol., Cambridge, MA, Sept. 1997
- [15] A. Benachour, S. Embabi, and A. Ali, "A 1.5GHz sub-2mW CMOS dual modulus prescaler," in *Proc. IEEE Custom Integrated Circuits Conf. (CICC)*, San Diego, CA, May 1999, pp. 613-616
- [16] N. Krishnapura and P. Kinget, "A 5.3-GHz programmable divider for HiperLAN in 0.25- μ m CMOS," *IEEE J. Solid-State Circuits*, vol. 35, pp. 1019-1024, July 2000
- [17] D. Mijuskovic, M. Bayer, T. Chomicz, N. Garg, F. James, P. McEntarfer, and J. Porter, "Cell-based fully integrated CMOS frequency synthesizers," *IEEE J. Solid-State Circuits*, vol. 29, pp. 271-279, Mar. 1994
- [18] J. Craninckx and M. Steyaert, "A fully integrated CMOS DCS-1800 frequency synthesizer," *IEEE J. Solid-State Circuits*, vol. 33, pp. 2054-2065, Dec. 1998
- [19] W. Chen and J. Wu, "A 2-V, 1.8-GHz BJT phase-locked loop," *IEEE J. Solid-State Circuits*, vol. 34, pp. 784-789, June 1999
- [20] C. Lo and H. Luong, "A 1.5-V 900-MHz monolithic CMOS fast-switching frequency synthesizer for wireless applications," *IEEE J. Solid-State Circuits*, vol. 37, pp. 459-470, Apr. 2002
- [21] Y. Koo, H. Huh, Y. Cho, J. Lee, J. Park, K. Lee, D. Jeong, and W. Kim, "A fully integrated CMOS frequency synthesizer with charge-averaging charge pump and dual-path loop filter for PCS- and cellular-CDMA wireless systems," *IEEE J. Solid-State Circuits*, vol. 37, pp. 536-542, May 2002
- [22] T. Kan, G. Leung, and H. Luong, "2-V, 1.8-GHz fully integrated CMOS dual-loop frequency synthesizer," *IEEE J. Solid-State Circuits*, vol. 37, pp. 1012-1020, Aug. 2002
- [23] S. Solis-Bustos, J. Silva-Martínez, F. Maloberti, and E. Sánchez-Sinencio, "A 60-dB dynamic range CMOS sixth-order 2.4-Hz Low-pass filter for medical applications," *IEEE Trans. Circuits Syst. II*, vol. 47, pp. 1391-1398, Dec. 2000
- [24] K. Shu, E. Sánchez-Sinencio, F. Maloberti, and U. Eduri, "A comparative study of digital $\Sigma\Delta$ modulators for fractional-N synthesis," in *IEEE Proc. ICECS'01*, Malta, Sept. 2001, pp. 1391-1394

Chapter 2

FREQUENCY SYNTHESIZER FOR WIRELESS APPLICATIONS

This chapter describes some fundamentals of frequency synthesizers. It covers the definition, specification, implementation and application of frequency synthesizers. The timing jitter and phase noise, the architecture of frequency synthesizers, and the frequency synthesizer's specification for wireless applications are overviewed.

2.1 Definition and characteristics

A frequency synthesizer (FS) is a device that generates one or many frequencies from one or a few frequency sources. Fig. 2-1 illustrates the input and outputs of an FS.

The output of an FS is characterized by its frequency tuning range, frequency resolution, and frequency purity. Ideally, the synthesized signal is a pure sinusoidal waveform. But in reality, its power spectrum features a peak at the desired frequency and tails on both sides. The uncertainty of a synthesizer's output is characterized by its phase noise (or spur level) at a certain frequency offset from the desired carrier frequency in unit of dBc/Hz (or dBc). The unit of dBc/Hz measures the ratio (in dB) of the phase noise power in 1Hz bandwidth at a certain frequency offset to the carrier power. Similarly, the unit of dBc measures the ratio (in dB) of the spur (also known as tone) power at a certain frequency offset to the carrier power. More discussions on the phase noise are covered in the next section. The phase noise requirement of a frequency synthesizer depends on applications. For

- [read An End to Evil: How to Win the War on Terror](#)
- [Archmage \(Homecoming, Book 1\) pdf, azw \(kindle\), epub, doc, mobi](#)
- [click Brand Failures: The Truth About the 100 Biggest Branding Mistakes of All Time \(2nd Edition\) pdf](#)
- [A Good Killing \(Anna Curtis, Book 4\) here](#)
- [Ravensbruck: Life and Death in Hitler's Concentration Camp for Women pdf](#)

- <http://www.uverp.it/library/An-End-to-Evil--How-to-Win-the-War-on-Terror.pdf>
- <http://kamallubana.com/?library/Max-Smart---The-Spy-Who-Went-Out-to-the-Cold--Get-Smart--Book-7-.pdf>
- <http://test1.batsinbelfries.com/ebooks/Victorian-Classical-Burlesques--A-Critical-Anthology--Bloomsbury-Studies-in-Classical-Reception-.pdf>
- <http://metromekanik.com/ebooks/Baking-for-the-Specific-Carbohydrate-Diet--100-Grain-Free--Sugar-Free--Gluten-Free-Recipes.pdf>
- <http://www.mmastyles.com/books/Ravensbruck--Life-and-Death-in-Hitler-s-Concentration-Camp-for-Women.pdf>